


ROCKDRIL



HOLE RANGE

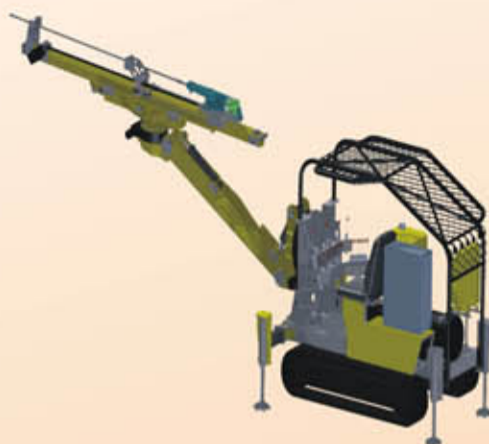

MEERKAT 25X

MIN DIMENSIONS & DRY WEIGHT

Width	1400 mm
Height	2250 mm
Weight	2.3 tons

ELECTRIC MOTOR

Type	4 pole
Power	40 hp
Rpm	1470
Voltage	380

WATER INJECTION PUMP

Type	3 piston
Capacity	10 L/min adjustable flow
Max. pressure	35 kg/cm ²

UNDERCARRIAGE

Steel shoe, available with rubber pads
Travel speed of 3km/h

CONTROL PANEL

All controls are located strategically to obtain better optical view when drilling is in process.

HYDRAULIC SYSTEM

Pump	Piston pump / Gear Pump
Tank Capacity	60 L
Filtration	10 micron
Cooling System	Air
Operating Pressure	200 bar (2900 psi)

DRILLING CAPACITY (in optimal conditions)


Drifter Power	7 Kw
Drifter Rpm	0-150-310
Max. Torque	200 Nm
Swivel	For water/air injection
Drilling Angles	360° in any direction
Max. Diameter	36 mm (R25)
Max. Depth	10 m
Drill Rod Length	2.4 meter

OPTIONAL MODIFICATIONS

Pneumatic top hammer
DTH hammer
Short length mast for narrow tunnel drilling

APPLICATIONS

- Tunneling
- Mining / Quarrying
- Anchor Bolts

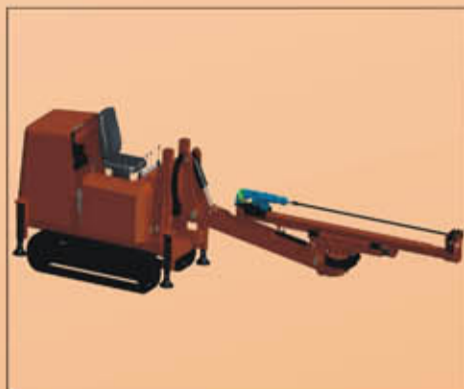

EXCLUSIVELY REPRESENTED IN PAKISTAN BY:

SECURA GROUPS

Email: secura@cyber.net.pk

Website: www.secura-group.com